


ML-G Datasheet

POSITIONING LASER GREEN Ø20MM

Page 2

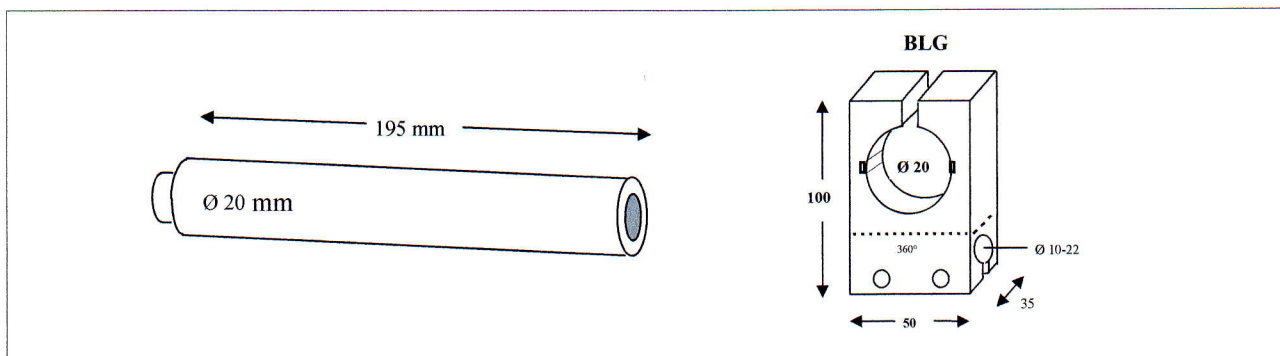

ML-G APPLICATION

Description

Green laser diode offers the same power with significantly better visibility than a red laser.

Industry

Textiles, Wood, Stone, Machine construction, etc.

Machines

Sawing operations for Stone, Wood, etc.

Environment

in illuminated areas or rooms, without direct sunlight.

AVAILABLE MODELS & SPECIFICATIONS

Reference	Wave-length	Power	Line distance
LT532/10/ML-G	532 nm	10 mW	3 - 5 m
LT532/20/ML-G	532 nm	20 mW	5 - 7 m
LT532/30/ML-G	532 nm	30 mW	6 - 9 m
LT532/40/ML-G	532 nm	40 mW	8 - 12 m

ACCESSORIES

Holders:	BLG	BZ	BS	BL	BK
Optic:	Point-optic	Powerline			

TECHNICAL DATA

Dimension.....	Dm. 20 * 195 mm
Lifetime.....	+ / - 25,000 Hours
Wavelength.....	532 nm
Power.....	10 - 40 mW
Weight.....	0,3 kg
Input.....	6 / 12 - 30V DC
Isolation Class.....	IP 64
Laser Class.....	2 / 2M
Work temperature.....	- 15 - + 40° C
Stock temperature.....	- 40 - + 60° C
Air moisture.....	0 - 85 %
Power Consumption.....	3 W
Warrenty.....	24 months.



IG-Lasertechnik
Industriestraße 7
D- 53909 Zülpich
Tel. +49(0)2252-8360190
Fax. +49(0)2252-8360191
DE 195 533 141
info@igl.com.de
www.igl.com.de