



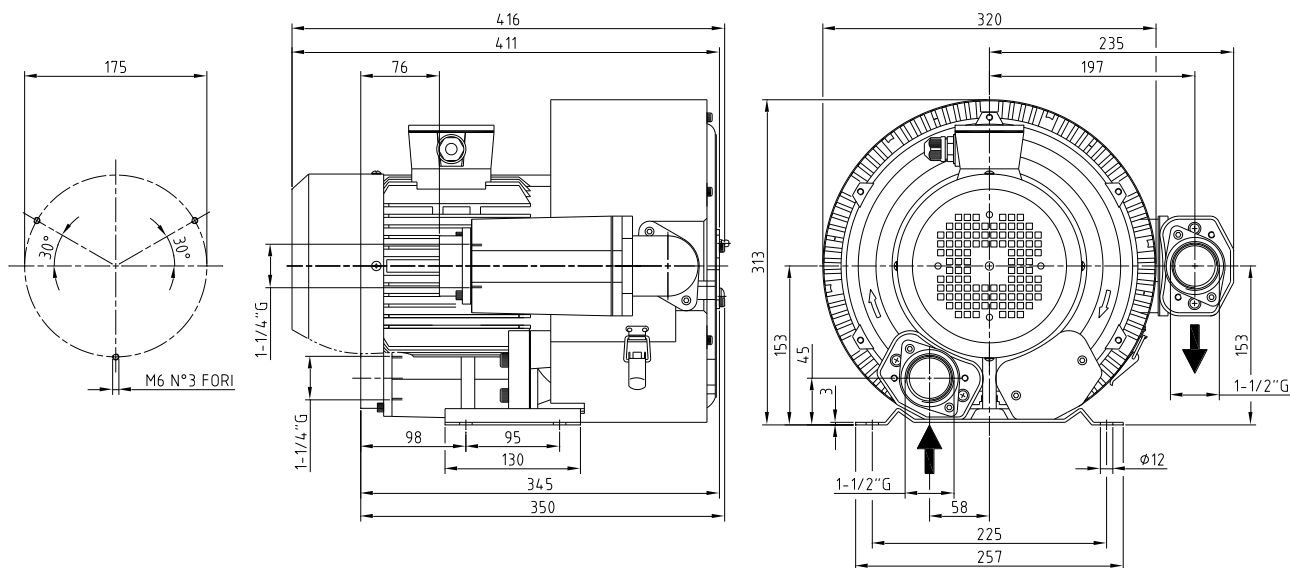


Modello Modelo		TDC.150	TDC.150-1
Codice Código		9403031	9403032
Potenza motore Potência do motor	kW (50Hz) kW (60Hz)	1,5 1,8	2,2 2,7
Alimentazione Tensão de alimentação elétrica	V±5% Δ/Y (50Hz) V±5% Δ/Y (60Hz)	220-255 / 380-440 255-277 / 440-480	
Assorbimento Corrente do motor elétrico	A Δ/Y (50Hz) A Δ/Y (60Hz)	6,7 / 3,9 7 / 4	7,8 / 4,5 9,5 / 5,5
Portata Vazão	m³/h (50Hz) m³/h (60Hz)	150 175	150 175
Vuoto Vácuo	mbar (50Hz) mbar (60Hz)	-275 -300	-280 -350
Sovrappressione Pressão	mbar (50Hz) mbar (60Hz)	+320 +300	+375 +435
Rumorosità (UNI EN ISO 2151) (K 3dB) Nível de ruído (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	66 69	66 69
Peso Peso	kg [N]	29,9 [293,3]	32,5 [318,8]


Vacuum 50Hz @ 400V

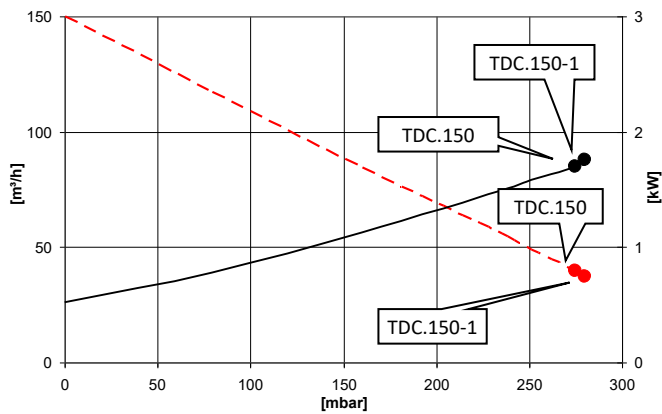


Pressure 50Hz @ 400V

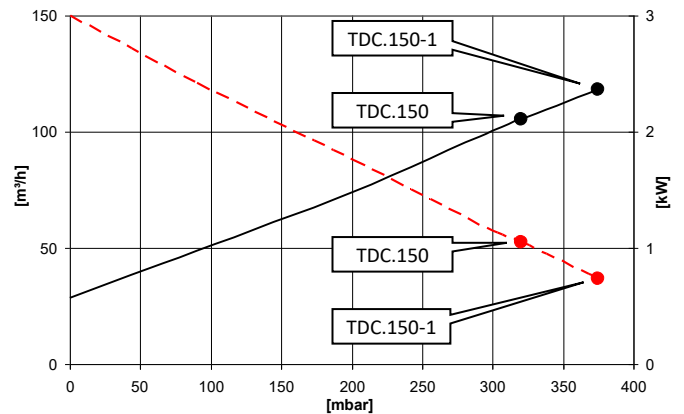

Vacuum @ 60Hz - 460V

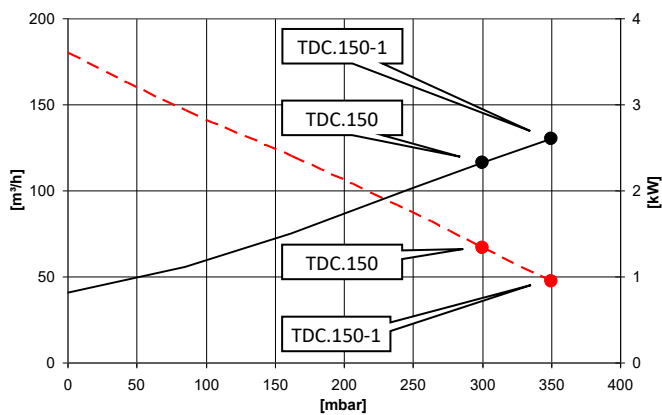

Pressure @ 60Hz - 460V

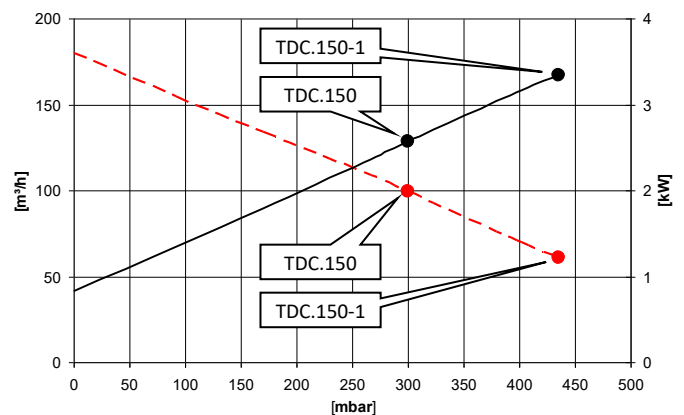


----- Portata / Flow rate


———— Pot. Assorbita / Absorbed Power

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
Curvas referidas à pressão de 1013mbar (Abs.) e temperatura de 20°C (tolerância ±10%)

50Hz - 400V

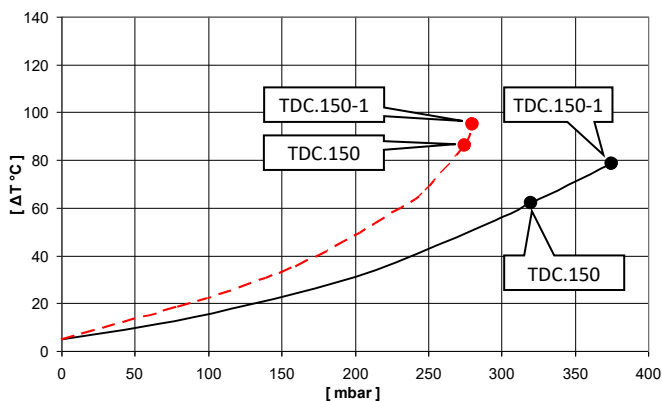

60Hz - 460V

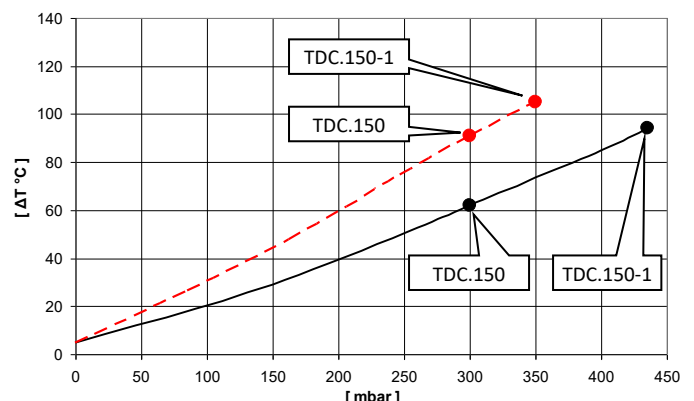

----- Aspirazione / Suction

———— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
Temperatura ambiente 20°C (tolerância sobre temperature ΔT ±5°C)